更改 REV	出 图 日 期 DATE	设 变 内 容 MODIFICATION	修 改 DRAWN
A	2019/01/26		

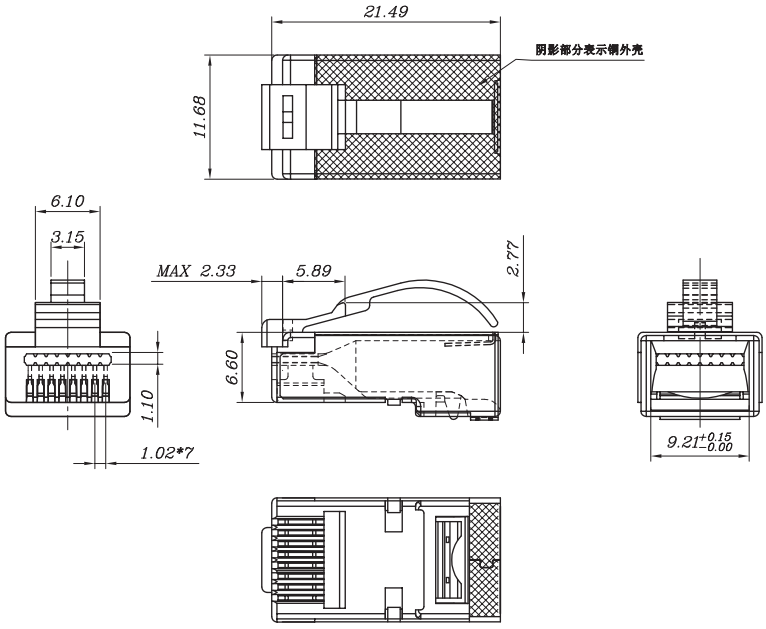

SPECIFICATIONS
1.ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.
OPERATING AMBIENT TEMPERATURE: -20℃ ~ 75℃.
2.MECHANICAL:
STRAIN RELIFE: 20POUND MIN.
DURABILITY: 1200 MATING CYCLES.
3.MATERIAL:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 3u"~50u", ARE AVAILABLE.
SHIELDED SHELL: COPPER ALLOY.
4. USAGE:
SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.

规范
1. 电器特性:
UL应用: 250 VOLTS AC. 最大 2 AMPS
耐电压:1000 VOLTS AC. 60秒
绝缘阻抗: 500 百万欧姆.
接触阻抗: 小于 20 毫欧姆
工作环境温度:-20℃ ~ 75℃.
2. 机械特性:
拉力测试: 大于 20磅.
插拔测试: 大于 1200 次.
3. 材质:
塑胶体: 聚碳酸脂, UL-94V-0 或 UL94V-2.
颜色: 透明, 或依客戶需求
金片: 铜合金.
镀金厚度: 3u"~50u",皆可提供.
铜外壳: 铜合金.
4. 适用线材:
多股线 & 单股线, 23AWG ~ 26AWG均适用.

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	FLAT
Mark						✓	Mark	✓

发布章 Issued 2019 03 06 开发部 R&D

客 户 用 产 品 图

EXW 宁波卓新通讯接插件有限公司
NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL	图 号 DWG NO.
		PC	PLUG-476-0001
.X±0.20	.X°±5°	名称 TITLE	P88FZ50V2S-C6-EC
.XX±0.10	.XX°±2°		
审 核 APPROVAL: 沈红波	核 对 CHECKED: 钟均江	制 图 DRAWN: Zach	比例 SCALE 2/1 · 张数 SHEET 1/1 · 角法 PROJ. · 更改 REV A

ST-DR-009A